


# ISO CARD

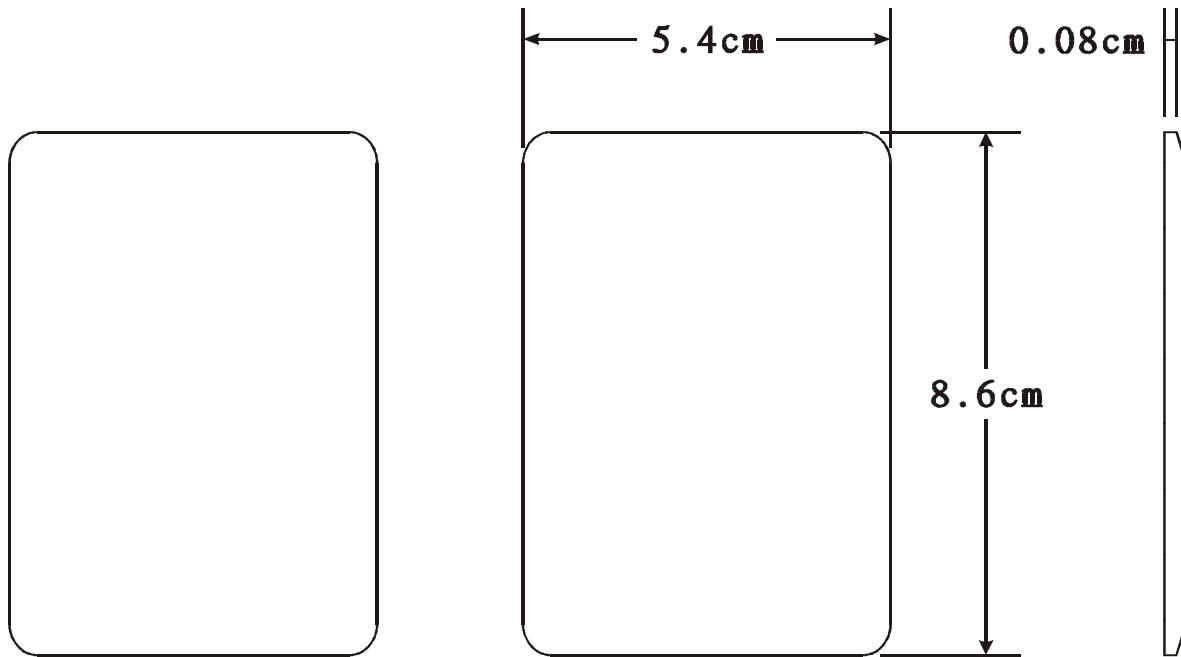

## Specifications

### Typical maximum read range:

GP20 up to 15 cm  
GP30 up to 25 cm

### Dimensions:

( 8.57 X 5.40 X 0.08 cm )

### Operating temperature:

-45° to 70°C

### Storage temperature:

-50° to 160°F (-45° to 70°C)

### Part number

Part NO.: PF22

Description: 125kHz, ASK, Manchester coding

Rate timing: MOD64 (64 clocks per bit)

### Options:

· Customer assigned numbers

· Number printing

### Chip type:

EM H4002 (or compatible)

**Slot punch:** Matches most vertical ID badge

## Features

**Compatibility:** EM H4002

**Coding:** Factory preprogrammed

**Options:** Field programmable

**Passive:** No batteries required

**Security:** Customer defined unique formats (option)

AceProx Identifiikations GmbH

Bahnhofstr. 4

31691 Helpsen

Germany

Tel.: +49-5724-98360

Fax: +49-5724-98361